
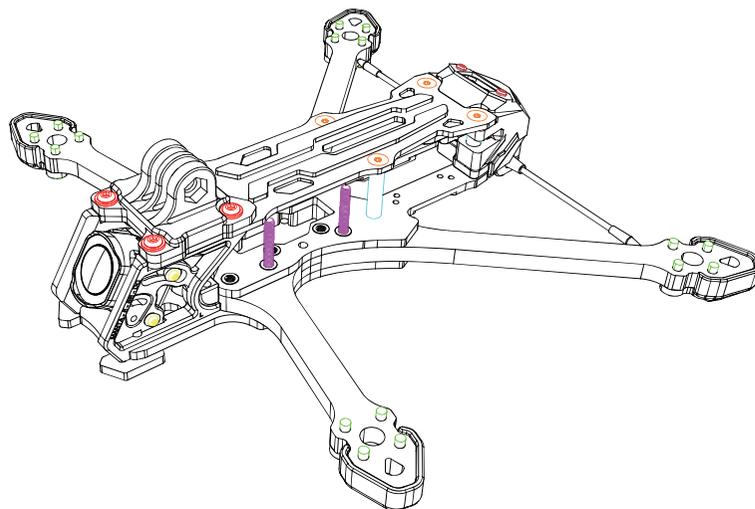


## Accessory List

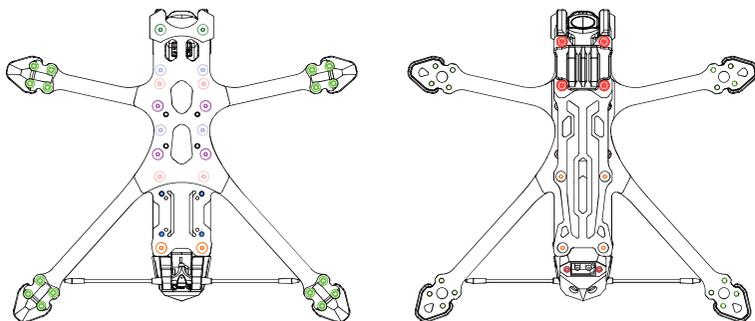

Top Carbon Plate	X1	GoPro Mount 3D Printed Part	X1	<b>For Analog/O4 Lite Version Added</b>	
Middle Carbon Plate	X1	Beeper Bracket 3D Printed Part	X1	Universal Tail 3D Printed Part	X1
Bottom Carbon Plate	X1	GPS Mount 3D Printed Part	X1	O4 Lite Camera Spacer 3D Printed Part	X2
Front Arm	X2	Universal Receiver Antenna Mount 3D Printed Part	X1	M2*5mm Button Head Hex Screw	X4
Rear Arm	X2	XT60EW-M Male Insulator 3D Printed Part	X1	M2*6mm Button Head Hex Screw	X4
Protection Plate	X1	Cable Sleeve	X4	M2*10mm Button Head Hex Screw	X4
Camera Aluminum Mount (L)	X1	AXIS Panda Sticker 1	X1	<b>For O4 PRO Version Added</b>	
Camera Aluminum Mount (R)	X1	AXIS Panda Sticker 2	X1	Universal Tail 3D Printed Part	X1
Universal Injection-Molded Foot Pad	X4	Buzzer	X1	O4 Lite Camera Spacer 3D Printed Part	X2
Injection-Molded Front Side Plate (R)	X1	Anti-Slip Silicone Battery Strap	X2	O4 Camera Vibration Damping Column	X4
Injection-Molded Front Side Plate (L)	X1	Custom power cable	X1	M2*6mm Button Head Hex Screw	X4
Universal Injection-Molded Rear Side Plate (R)	X1			M2*10mm Button Head Hex Screw	X4
Universal Injection-Molded Rear Side Plate (L)	X1			<b>For O3 Version Added</b>	
Battery Anti-Slip Pad (R)	X1			Universal Tail 3D Printed Part	X1
Battery Anti-Slip Pad (L)	X1			M1.6*8mm Cup Head Hex Screw	X4
M2.5*8mm Countersunk Hex Screw	X2			O3 Camera Spacer	X2
M3 Nylon Nut	X4			M2*5mm Button Head Hex Screw	X4
M3*20mm Aluminum Standoff	X4				
M3*8mm Button Head Hex Screw with Washer	X4				
M3*12mm Button Head Hex Screw	X16				
M3*6mm Countersunk Hex Screw	X6				
M3*10mm Countersunk Hex Screw	X2				
M3*12mm Countersunk Hex Screw	X4				
M3*16mm Countersunk Hex Screw	X4				
M3*30mm Countersunk Hex Screw	X4				
M5 Flange Stainless Steel Nut	X1				
M5*20mm Flat Head Hex Stainless Steel Screw	X1				

## Frame parameters

Wheelbase	226mm
Supported Prop Size	Max 5.1"
Stack installation	20mm(M3)&30.5mm(M3)
Motor Installation	16mm*16mm/M3
Camera Installation	14-20mm
Max Stack Height	20mm
carbon fiber plate	T700
Top plate thickness	2mm
center plate thickness	3mm
Bottom plate thickness	3mm
Arm Thickness	6mm
VTX Installation	20mm&25.5mm(M2)
Frame Weight	172+5g(Includes printouts)