XT60 cable for FPV goggles

Readytosky

XT60 → DC 5.5 × 2.1 mm power cable



Before first use, read this manual and the manual of your FPV goggles.

Rotorama, s.r.o. · www.rotorama.com

Contents

1. Product description

1.1 What it is for

1.2 Specifications and package contents

2. Use

2.1 Before the first connection

2.2 Connecting and disconnecting

2.3 Safety and cable care

3. Information for the EU and Czech Market

3.1 Importer and responsible person in the EU

3.2 Disposal of electrical equipment


4. Warranty and rights arising from defective performance

1. Product description

1.1 What it is for

The Readytosky XT60 cable for FPV goggles is a power connection cable. On one end it has an **XT60** connector for connecting a battery, on the other end a **DC 5.5 × 2.1 mm** coaxial (barrel) connector for connecting to the power input of FPV goggles.

The cable lets you power your goggles from a larger battery with an XT60 connector that you can keep comfortably in your pocket while flying. The cable does not regulate the battery voltage in any way – it feeds the voltage of the connected battery directly to the goggles.

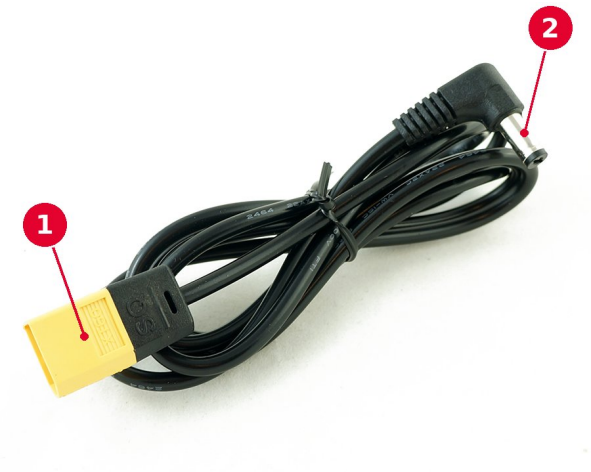

① XT60 connector (battery side) · ② DC 5.5 × 2.1 mm coaxial connector (goggles side)

1.2 Specifications and package contents

Product designation	Readytosky XT60 cable for FPV goggles
Manufacturer	Readytosky
Battery connector	XT60
Goggles connector	coaxial DC 5.5 × 2.1 mm
Cable length	1.2 m
Package contents	1× cable
Not included	battery, FPV goggles, charger

2. Use

2.1 Before the first connection

The cable feeds the full battery voltage to the goggles. Before first use, therefore, check in the manual of your FPV goggles:

- that the goggles have a power input with a **5.5 × 2.1 mm** coaxial connector,
- which **input voltage range** the goggles accept and which battery (number of cells) the goggles manufacturer permits,
- which **polarity** the power input of the goggles requires.

※ A battery with a higher voltage than the goggles can handle will permanently damage the goggles. Such damage is not a defect of the cable.

2.2 Connecting and disconnecting

① Insert the DC 5.5 × 2.1 mm coaxial connector into the power input of the goggles.

② Connect the XT60 connector to a fully charged battery with an XT60 connector. Insert the connectors straight and all the way in.

③ Put the battery in your pocket or attach it so that the cable is not under tension and cannot catch on surrounding objects.

④ When you have finished flying, first disconnect the XT60 connector from the battery and only then the connector from the goggles. When disconnecting, always pull on the connector body, never on the cable.

Do not leave the battery connected to the goggles when you are not using them. Monitor the battery voltage and do not discharge it below the value recommended by the battery manufacturer; with Li-Po batteries stop using them at 3.5 V per cell at the latest.

2.3 Safety and cable care

- Before each use, check the cable insulation and both connectors. Do not use a damaged cable or connector.
- The contacts of the XT60 connector must not touch each other or come into contact with metal objects – a battery short circuit can cause a fire.
- Do not bend the cable sharply, do not pinch it and do not subject it to tension, especially where it enters the connectors.
- Protect the cable from moisture, high temperatures and sharp edges.
- Do not modify the cable in any way and do not re-solder the connectors. Improper intervention may reverse the polarity or cause a short circuit.
- Keep out of the reach of children. This product is not a toy.


3. Information for the EU and Czech Market

3.1 Importer and responsible person in the EU

The product is placed on the European Union market by the importer stated below, who is at the same time the responsible person within the meaning of Article 16 of Regulation (EU) 2023/988 of the European Parliament and of the Council on general product safety (GPSR).

Importer / responsible person in the EU	Rotorama, s.r.o.
Company ID (IČO)	051 57 692
VAT ID (DIČ)	CZ05157692
Registered office	Okrajová 1351, 674 01 Třebíč, Czech Republic
E-mail	info@rotorama.cz
Phone	+420 252 252 098
Website	www.rotorama.com

3.2 Disposal of electrical equipment



- The crossed-out wheeled bin symbol on the product, its packaging or in the documentation means that at the end of its service life the product **must not be disposed of together with mixed municipal waste**.
- Hand it over at a take-back point for electrical equipment – at a collection yard, at a take-back point of a collective system, or at the retailer when purchasing a new equivalent product. Take-back is free of charge for the end user.
- The obligations under Act No. 542/2020 Coll., on end-of-life products, are fulfilled by the importer through a collective take-back system.
- Proper disposal helps prevent negative impacts on the environment and human health and contributes to the reuse of secondary raw materials.

Through its contractual partner **ASEKOL a.s.**, the company ensures the take-back of waste electrical equipment from households and the separate collection of waste electrical equipment, batteries and accumulators in accordance with the applicable legislation. The customer is entitled to hand over old electrical equipment or a battery or accumulator at any collection point of the above contractual partner. The addresses of these take-back points are listed at www.asekol.cz, www.ecobat.cz and also https://visoh2.mzp.cz/RegistrMistZO/RegistrMistZOPublic/MapaMistZpetOdberu.

4. Warranty and rights arising from defective performance

The rights and obligations of the contracting parties are governed by Czech law, in particular by Act No. 89/2012 Coll., the Civil Code, and Act No. 634/1992 Coll., on consumer protection.

- The seller is liable to the buyer for the product being free of defects on receipt. If the buyer is a consumer, a defect may be notified **within two years of receipt** of the product (Section 2165 of the Civil Code).
- If a defect appears within **one year** of receipt, the product is deemed to have been defective already at the time of receipt (Section 2161(5) of the Civil Code).
- When purchasing online, a consumer has the right to **withdraw from the contract within 14 days** of receiving the goods without giving a reason (Section 1829 of the Civil Code).
- Claims should be made with the retailer from whom you purchased the product. The importer's contact details are given in Chapter 3.1.
- The competent body for out-of-court settlement of consumer disputes is the **Czech Trade Inspection Authority**, Štěpánská 796/44, 110 00 Prague 1, www.coi.cz.