



RunCam PHOENIX2 NITE

USER MANUAL

Connection

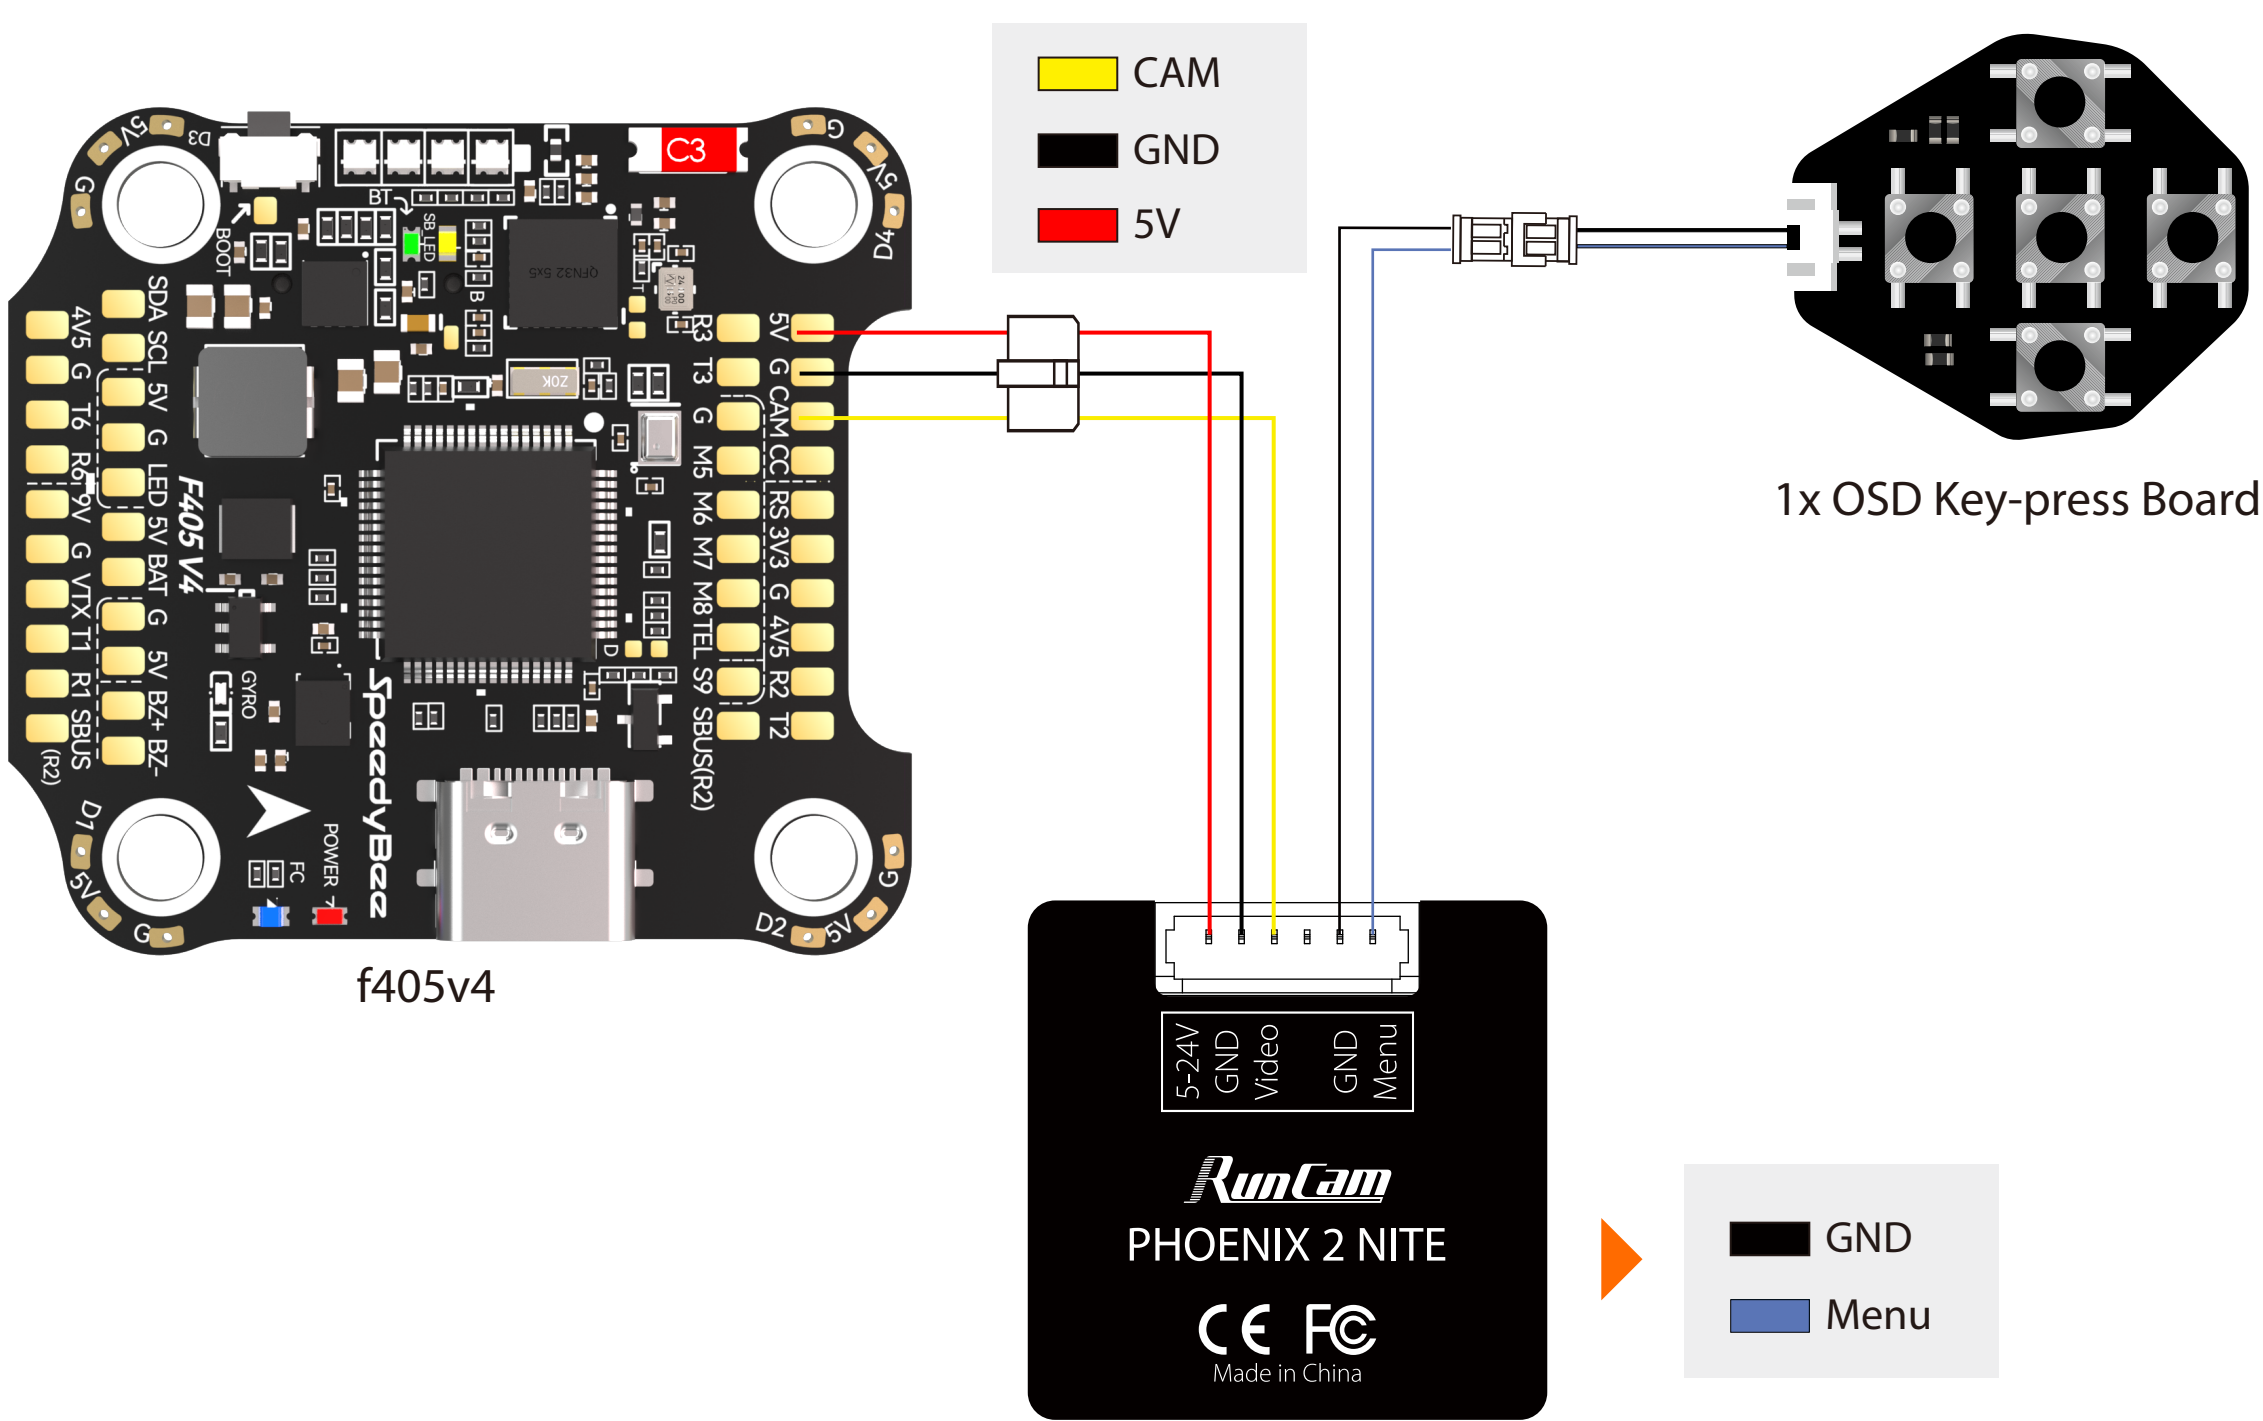

Dimensions & Installation

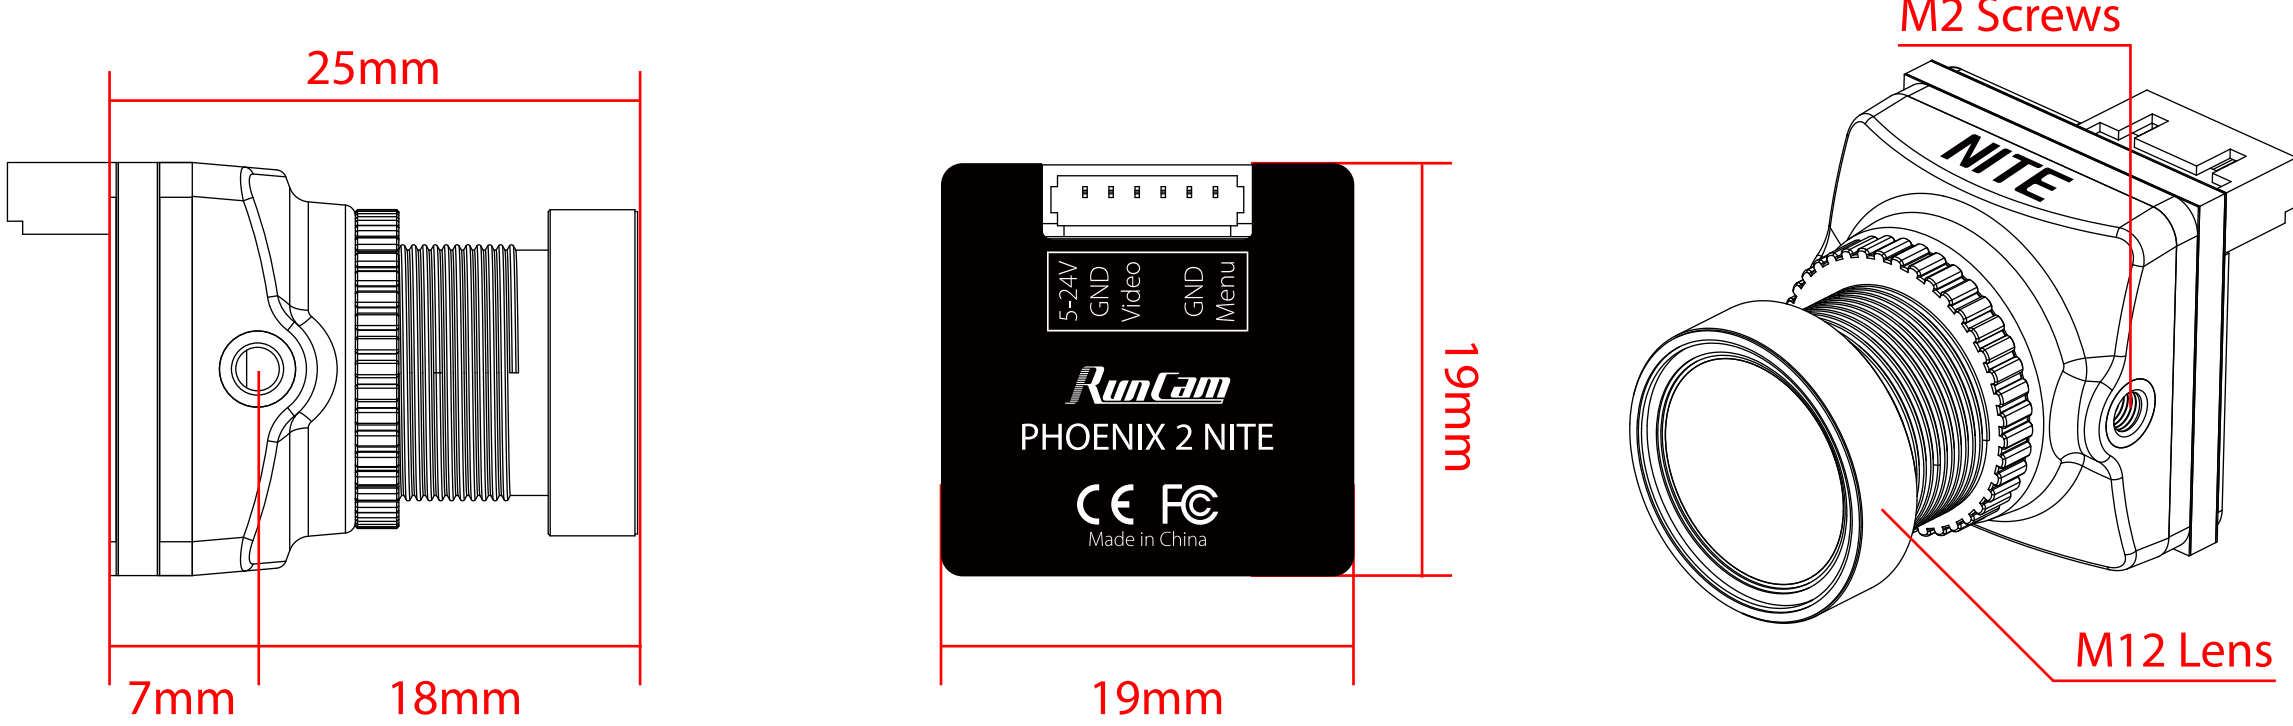

Camera Menu

MAIN MENU		
EXPOSURE		←
DAY&NIGHT		←
COLOR		←
DNR		LOW
IMAGE		←
SYSTEM		←
EXIT		

EXPOSURE		
BRIGHTNESS		◀ 10 ▶
SHUTTER		◀ AUTO ▶
AGC		10
RETURN		

DAY NIGHT		
MODE		◀ AUTO ▶
D>N THRES	13	
N>D THRES	7	
DELAY	LOW	
RETURN		←

COLOR		
AWB		◀ AUTO ▶
COLOR GAIN	10	
COLOR ADJ		←
RETURN		←

IMAGE		
SHARPNESS	4	
GAMMA	0.45	
MIRROR	OFF	
FLIP	OFF	
RETURN		←

SYSTEM		
PILOT		OFF
TIMER		ON
VOLTAGE		ON
SYSTEM	N/P	NTSC
SCREEN		16:9
LANGUAGE		ENG
RESET		ON
RETURN		←

Specifications

Camera Mode	Phoenix2 Nite	
Sensor	1/2.8" 2MP	
Horizontal Resolution	1500TVL	
Lens	M12 (No IR Filter)	
FOV	FOV D:125° H:107° V:56°	FOV D:97° H:75° V:56°
Screen Format	16:9	4:3
Modes	B&W(Default) / Color	
Sensitivity	11390 millivolts/lux-second	
Signal System	PAL / NTSC	
Power Input	DC 5-24V	
Current	90mA@12V / 250mA@5V	
Dimensions	19mm *19mm *27mm	
Net Weight	8g	
Connector	Standard 6Pin (1.25mm Pitch)	